


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	10/21/2021	/

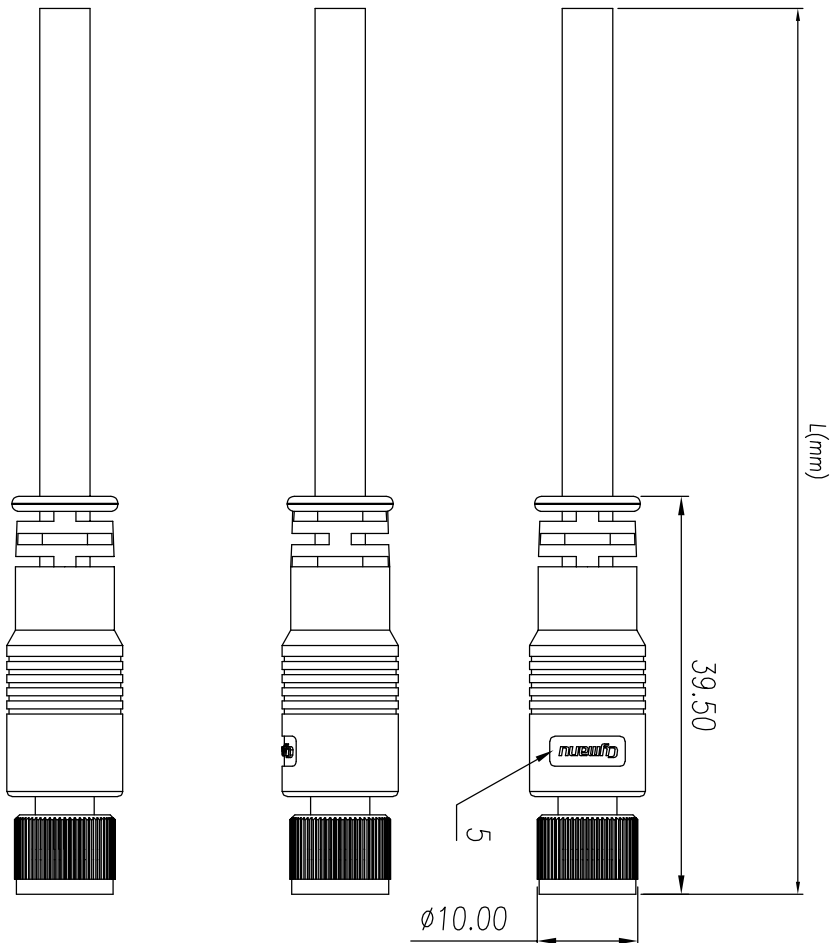


- NOTES:
1. RoHS Compliant
 2. Levels of protection: IP68
 3. Cable: UL2517,PVC/PUR,Black
 4. Operating temperature: -25℃~85℃
 5. Company Logo
 6. Connector tolerances:

linear dimension	≡		□		//		⊥	
	over	over	over	over	over	over	over	
variable	18	30	50	80	120	160	all	over
range	to	to	to	to	to	to	to	to
tolerance	±0.15	±0.25	±0.35	±0.55	±0.80	±1.05	±1.30	0.5
							0.025	0.06
							0.12	0.4

7. Cable length tolerance:

- 01~03m: ±50mm
- 04~06m: ±75mm
- 07~10m: ±100mm
- 11~20m: ±200mm
- 21~30m: ±300mm
- 31~99m: ±500mm

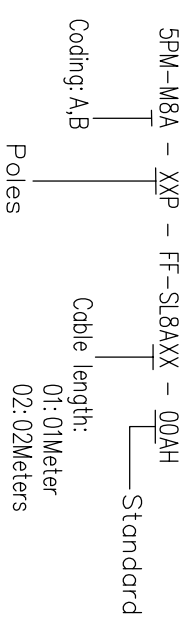

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 4 : 3	DRAWN: K. ZHAO	DATE: 10/21/2021
UNIT: mm	SHEET: 1 / 2	CHECKED: C. LU	DATE: 10/21/2021
		APPROVED: H. JIANG	DATE: 10/21/2021

PART NO: SPM-M8A-XXP-FF-SLBAXX-00AH
TITLE: M8A female, Plug
CUSTOMER: /

Cymannu 囍字電子

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD

Email: sales@cymannu.com WWW.CYMANNU.COM

