


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	10/21/2021	/



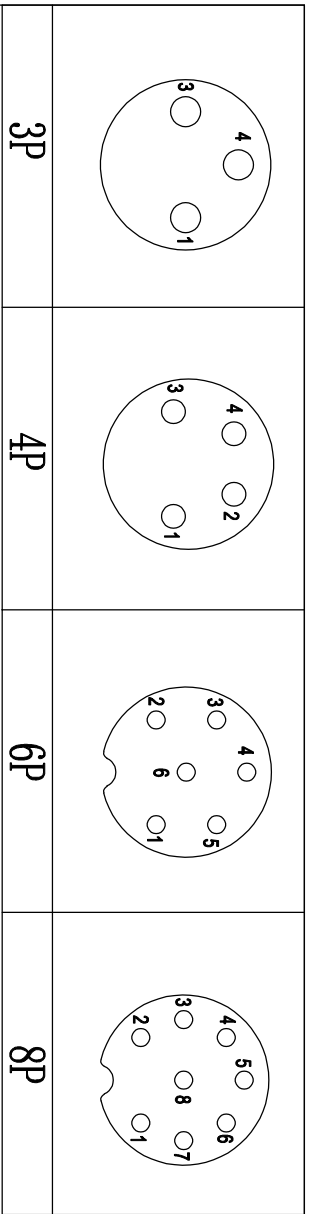


Pin Assignments

NOTES:

1. RoHS Compliant
2. Levels of protection: IP67
3. Installation mode: Solder
4. Operating temperature: -40°C~105°C
5. Connector tolerances:

variable range	linear dimension										≡	□	∥	⊥	
	over 18 to 10	over 30 to 30	over 50 to 50	over 80 to 80	over 120 to 120	over 160 to 160	over 200 to 200	all	over 5 to 5	over 30 to 30					over 120 to 120
tolerance	±0.15	±0.25	±0.35	±0.55	±0.80	±1.05	±1.30	0.5	0.025	0.06	0.12	0.4			



5PM-M8A - XXP - FF-SL7000 - 00AH
Coding: A,B
Poles
Standard

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 4:3	CHECKED: C. LU	APPROVED: H. JIANG	DATE: 10/21/2021	UNIT: mm	SHEET: 1/1
DRAWN: K. ZHAO		DATE: 10/21/2021		PART NO.: SPM-M8A-XXP-FF-SL7000-00AH		
TITLE: M8A female, Plug Solder		CUSTOMER: /				

Cymannu 囍字電子
NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
Email: sales@cymannu.com WWW.CYMANNU.COM