
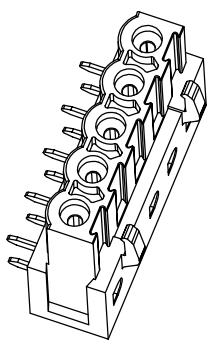
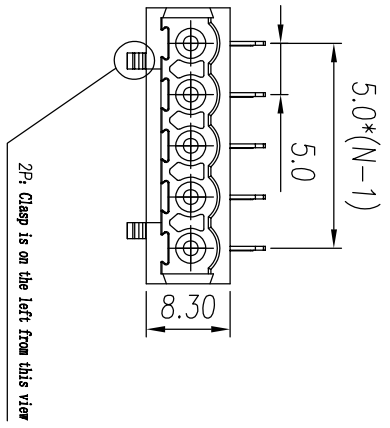
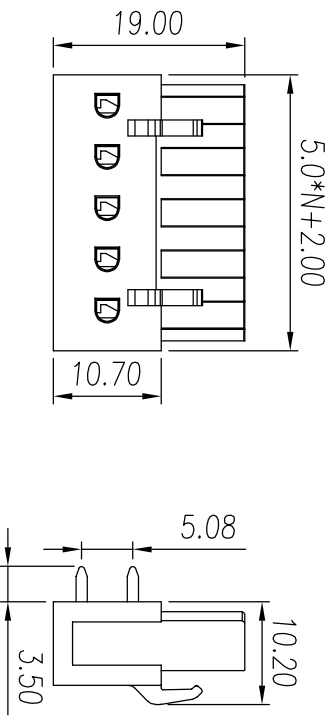


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	07/12/2021	

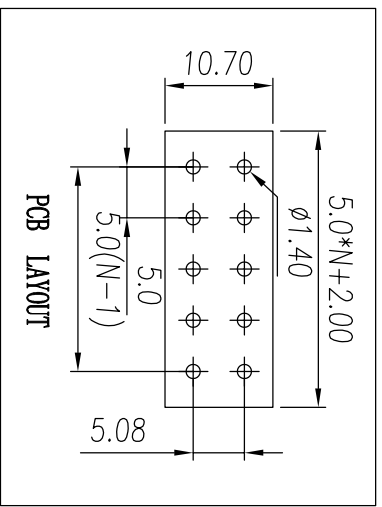


NOTES:
1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	15	/	15
Rate impulse voltage(KV)	1.6		

2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4	4	4
Rate voltage(V)	630	320	320
Rate current(A)	20		

- 3. Pitch : 5.0 mm
- 4. Operating temperature: -40°C~+105°C
- 5. RoHS Compliance
- 6. Material: Housing PA66,UL94V-0
Pin copper alloy,Sn plated

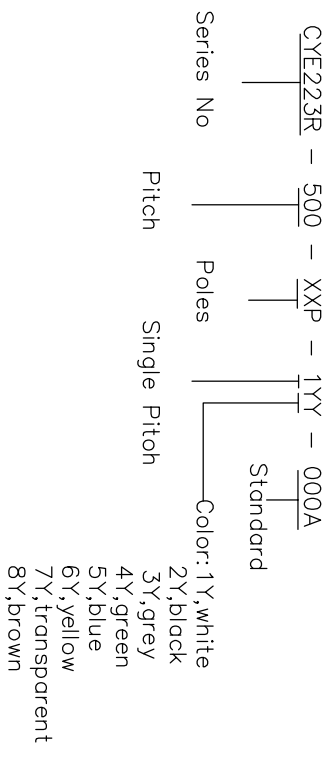

Remark: This drawing is a controlled document for Cymann. All specifications are subject to change without prior notice.

linear dimension	Tolerance										
	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12
over	18	30	50	80	120	160	200	all	5	5	5
to	10	30	50	80	120	160	200	5	30	30	120

 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD Email: sales@cymann.com WWW.CYMANNU.COM	PART NO.: CYE223R-500-XXP-1YY-000A TITLE: Plug in connector CUSTOMER:	DRAWN: K. ZHAO CHECKED: C. LU APPROVED: H. JIANG	DATE: 07/12/2021 DATE: 07/12/2021 DATE: 07/12/2021	SIZE: A4 SCALE: 4 : 3 SHEET: 1 / 1	UNIT: mm
---	---	--	--	--	----------