


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	07/12/2021	

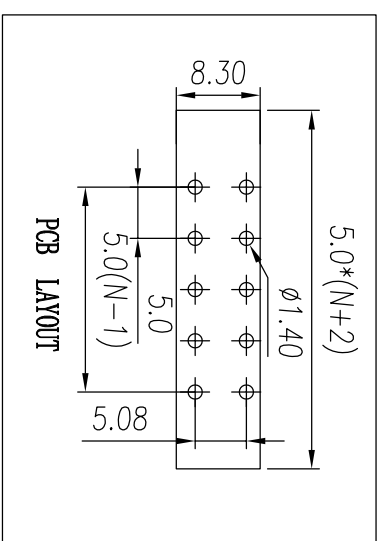

NOTES:

1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	15	/	15
Rate impulse voltage(KV)	1.6		

2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4	4	4
Rate voltage(V)	630	320	320
Rate current(A)	20		




3. Pitch : 5.0 mm

4. Operating temperature: -40°C~+105°C

5. RoHS Compliance

6. Material: Housing PA66,UL94V-0

Pin copper alloy,Sn plated

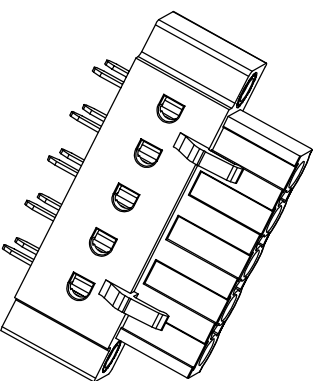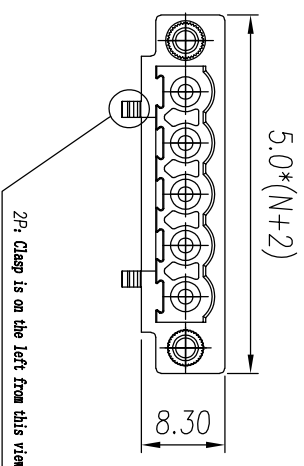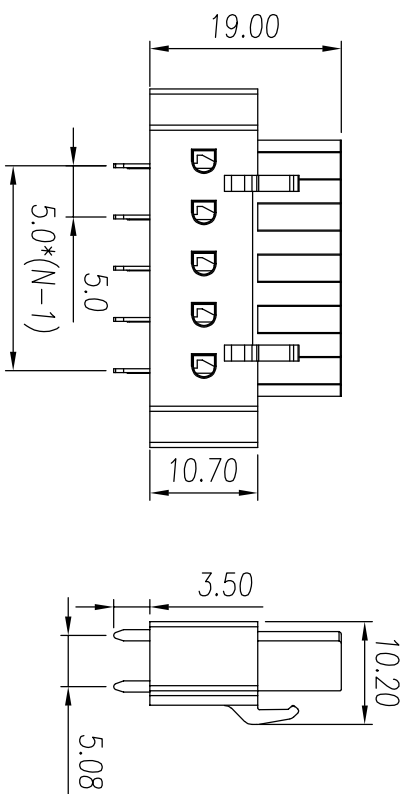

CYE223VM - 500 - XXP - 1YY - 000A  
 Series No Poles Single Pitch Standard  
 Color: 1Y, white  
 2Y, black  
 3Y, grey  
 4Y, green  
 5Y, blue  
 6Y, yellow  
 7Y, transparent  
 8Y, brown

Remark: This drawing is a controlled document for Cymanu. All specifications are subject to change without prior notice.

	linear dimension										≡	—	□	//	⊥
variable range	over 10 to 18	over 30 to 30	over 50 to 50	over 80 to 80	over 120 to 120	over 160 to 160	over 200 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to			
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4			

SIZE: A4	SCALE: 4 : 3	CHECKED: C. LU	DATE: 07/12/2021	DRAWN: K. ZHAO	DATE: 07/12/2021	PART NO: CYE223VM-500-XXP-1YY-000A	TITLE: Plug in connector
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 07/12/2021			CUSTOMER:	

**Cymanu** 矽宇電子  
 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD  
 Email: sales@cymanu.com WWW.CYMANU.COM