
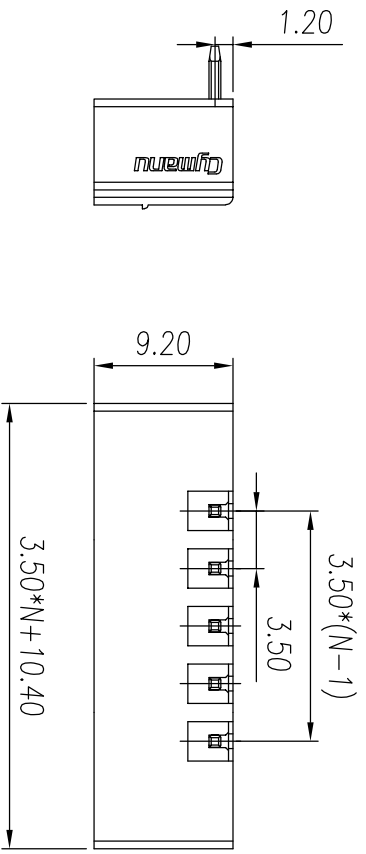
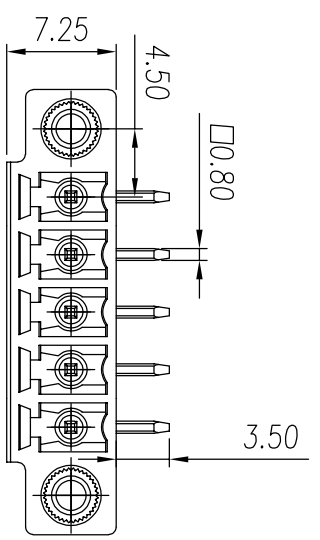


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	06/02/2021	

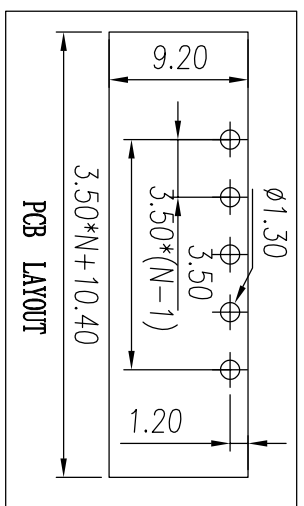


NOTES:
1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	8	/	8
Rate impulse voltage(KV)	1.6		

2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5	2.5	2.5
Rate voltage(V)	250	160	160
Rate current(A)	7		

- 3. Pitch : 3.5 mm
- 4. Operating temperature: -40°C~+105°C
- 5. RoHS Compliance
- 6. Material: Housing PA66,UL94V-0
Pin copper alloy,Sn plated
Nut copper alloy

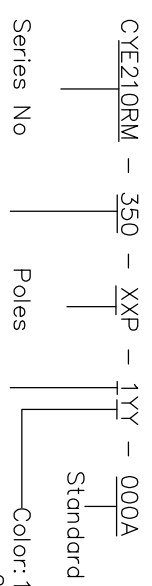

- Color: 1Y,white
2Y,black
3Y, grey
4Y, green
5Y, blue
6Y, yellow
7Y, transparent
8Y, brown

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

Linear dimension	≡	□	∥	L
over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160
over 160 to 200	all	to 5 to 30	over 30 to 120	over 120 to 1.2
tolerance ±0.15	±0.25	±0.35	±0.45	±0.60
	±0.75	±0.90	0.5	0.025
	0.025	0.06	0.12	0.4

SIZE	SCALE	CHECKED	DATE	DATE	DATE
A4	2 : 1	C. LU	06/02/2021	06/02/2021	06/02/2021
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG			

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
 Email: sales@cymannu.com WWW.CYMANNU.COM