
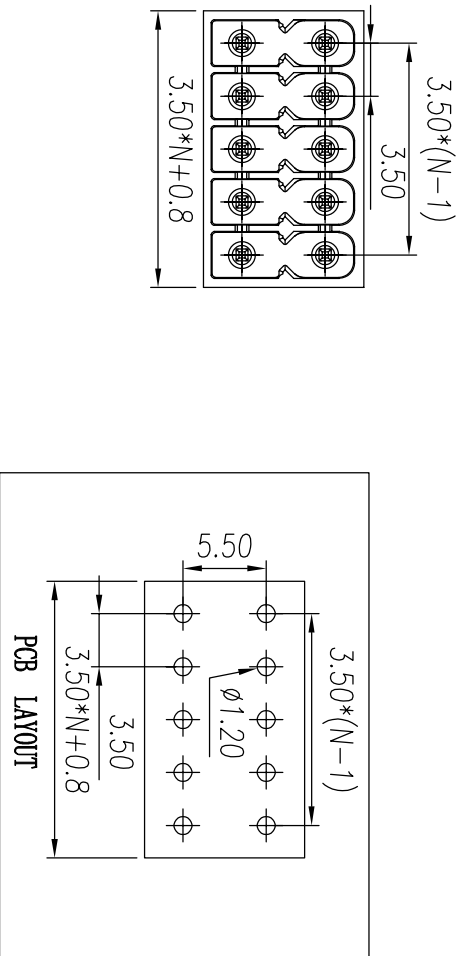
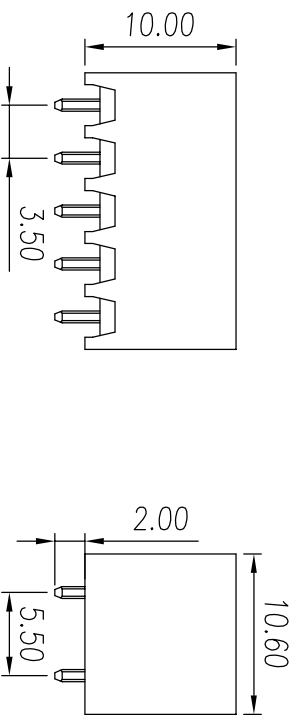


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	08/23/2021	



NOTES:  
1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	8	/	8
Rate impulse voltage(KV)	1.6		

2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5	2.5	2.5
Rate voltage(V)	250	160	160
Rate current(A)	8		

3. Pitch : 3.5 mm  
4. Operating temperature: -40°C~+105°C  
5. RoHS Compliance  
6. Material: Housing LCP, UL94V-0  
Pin copper alloy, Sn plated

CYE21ZVC - 350 - XXP - 1YY - 000A  
Series No Pitch Poles Single Pitch Color: 1Y, white  
2Y, black  
3Y, grey  
4Y, green  
5Y, blue  
6Y, yellow  
7Y, transparent  
8Y, brown

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

variable range	linear dimension						≡	—	□	//	⊥	
	over to	over to	over to	over to	over to	over to						
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4
	10	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	all	5 to 5	5 to 30	30 to 120	over to

SIZE	SCALE	CHECKED	DATE	PART NO.
A4	2 : 1	C. LU	08/23/2021	CYE21ZVC-350-XXP-1YY-000A
UNIT: mm	SHEET	APPROVED	DATE	CUSTOMER
1 / 1	1 / 1	H. JIANG	08/23/2021	Plug in connector

**Cymannu** 囍字電子  
NINGBO CHANGVU ELECTRONICS MANUFACTURING CO., LTD  
Email: sales@cymannu.com WWW.CYMANNU.COM