

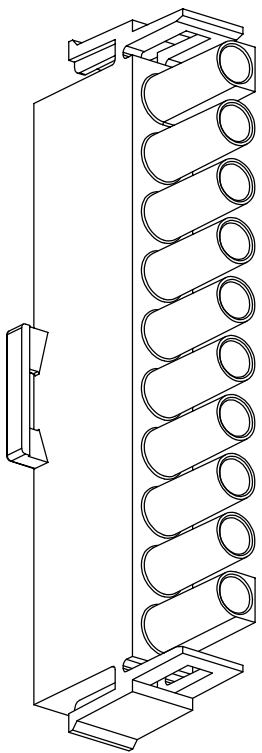

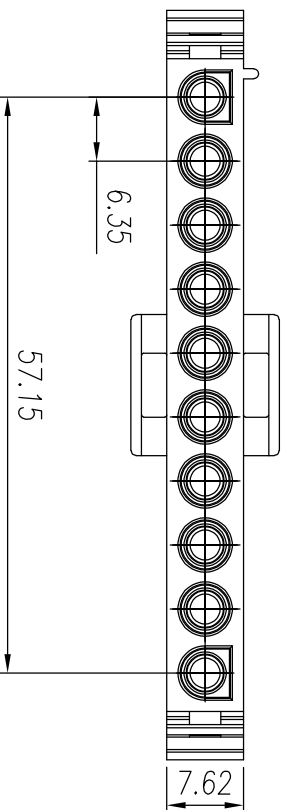


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/14/2021	




NOTES:

1. Pitch : 6.35 mm, Poles : N=10 P
2. Operating temperature: -40°C~+105°C
3. RoHS Compliance
4. Material: Housing PA66, UL94V-0

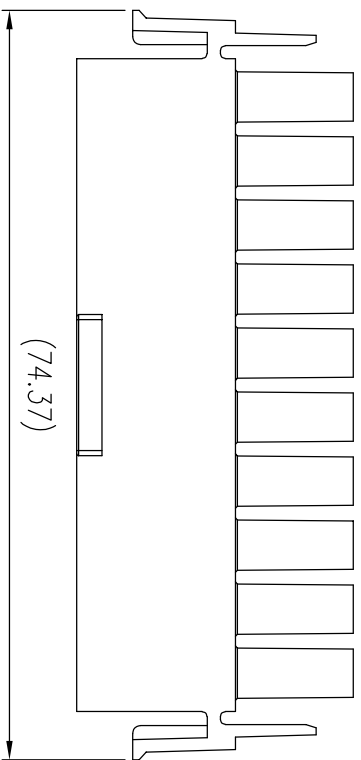

43020810YY20A



43020810YY10A

- Series No _____ Standard
- Color: 1Y, white
 2Y, black
 3Y, grey
 4Y, green
 5Y, blue
 6Y, yellow
 7Y, transparent
 8Y, brown

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

		linear dimension										≡		□		//		⊥							
tolerance	variable range	over 10 to 18	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to 180	over 180 to 250	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

SIZE: A4	SCALE: 4 : 3	CHECKED: C. LU	DATE: 12/14/2021	PART NO.: 43020810YY10A
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 12/14/2021	TITLE: Connector sheath