






REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/10/2020	

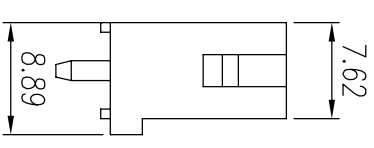

NOTES:

1. Pitch : 6.35 mm, Poles : N=02 P
2. Rate voltage(V): 600 ,Rate current(A):12
3. Operating temperature: -40°C~+105°C
4. Diameter for matched male terminal: 2.13mm
5. RoHS Compliance
6. Material: Housing PA66, UL94V-0  
Pin Phosphor bronze, Sn plated

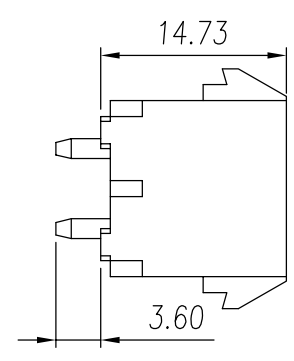

43000802YY10C  
Series No \_\_\_\_\_ Standard  
Color: 1Y, white  
2Y, black  
3Y, grey  
4Y, green  
5Y, blue  
6Y, yellow  
7Y, transparent  
8Y, brown

linear dimension

tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4
variable range	to 10	to 18	to 30	to 50	to 80	to 120	to 160	to 200	all	to 5	to 30	to 120
over	18	30	50	80	120	160	200	all	5	30	120	over

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 5 : 3	CHECKED: C. LU	DATE: 12/10/2021	PART NO: 43000802AYV10C	 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD Email: sales@cymannu.com WWW.CYMANNU.COM
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 12/10/2021	TITLE: PCB connector	