

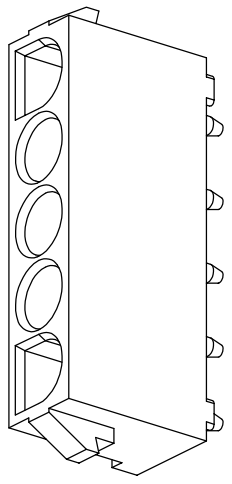
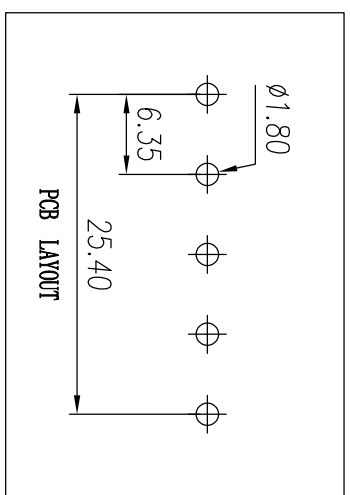
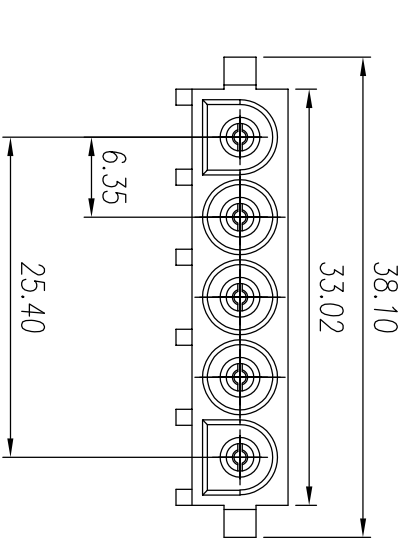


| REV | ECN | SIGN | DATE | DESCRIPTION |
|-----|-----|---------|------------|-------------|
| 1.0 | V0 | K. ZHAO | 12/10/2020 | |

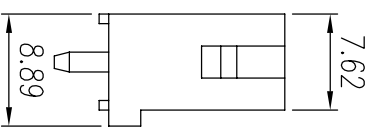

NOTES:

1. Pitch : 6.35 mm, Poles : N=05 P
2. Rate voltage(V): 600 , Rate current(A):12
3. Operating temperature: -40°C~+105°C
4. Diameter for matched male terminal: 2.13mm
5. RoHS Compliance
6. Material: Housing PA66, UL94V-0
Pin Phosphor bronze, Sn plated

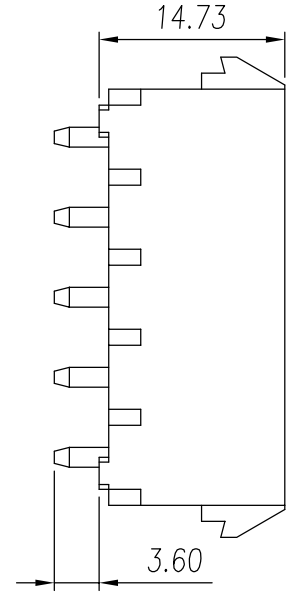

43000805YY10C
 Series No _____ Standard
 Color: 1Y, white
 2Y, black
 3Y, grey
 4Y, green
 5Y, blue
 6Y, yellow
 7Y, transparent
 8Y, brown

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

| | | linear dimension | | | | | | | | | | ≡ | | — | | □ | | // | | ⊥ | | | | |
|-----------|-------|------------------|-------|-------|-------|-------|-------|-----|-------|------|------|-----|---------------|---------------|---------------|----------------|-----------------|-----------------|-----|--------|--------------|----------------|-----------------|-----------------|
| tolerance | ±0.15 | ±0.25 | ±0.35 | ±0.45 | ±0.60 | ±0.75 | ±0.90 | 0.5 | 0.025 | 0.06 | 0.12 | 0.4 | over 18 to 30 | over 30 to 50 | over 50 to 80 | over 80 to 120 | over 120 to 160 | over 160 to 200 | all | 5 to 5 | over 5 to 30 | over 30 to 120 | over 120 to 180 | over 180 to 300 |

| | | | | |
|----------|--------------|--------------------|------------------|--------------------------|
| SIZE: A4 | SCALE: 5 : 3 | CHECKED: C. LU | DATE: 12/10/2021 | PART NO.: 43000805AYV10C |
| UNIT: mm | SHEET: 1 / 1 | APPROVED: H. JIANG | DATE: 12/10/2021 | TITLE: PCB connector |

Cymannu 囍字電子
 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
 Email: sales@cymannu.com WWW.CYMANNU.COM