

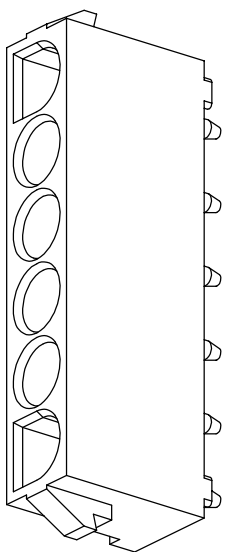
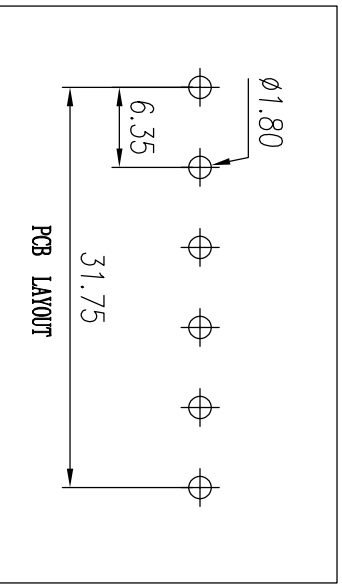
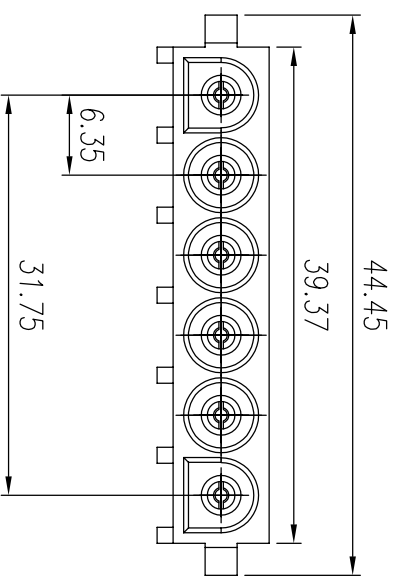


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/10/2020	

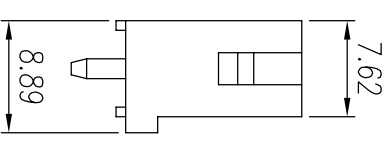

NOTES:

1. Pitch : 6.35 mm, Poles : N=06 P
2. Rate voltage(V): 600 , Rate current(A): 12
3. Operating temperature: -40°C~+105°C
4. Diameter for matched male terminal: 2.13mm
5. RoHS Compliance
6. Material: Housing PA66, UL94V-0
Pin Phosphor bronze, Sn plated

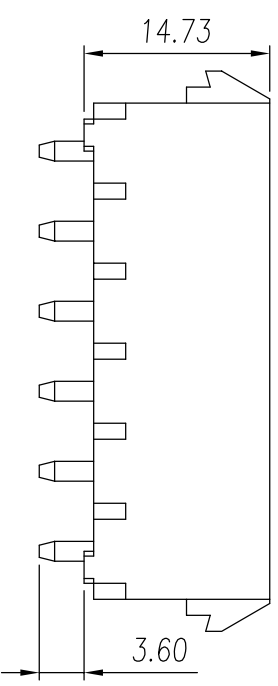

43000806YY10C
Series No _____ Standard
Color: 1Y, white
2Y, black
3Y, grey
4Y, green
5Y, blue
6Y, yellow
7Y, transparent
8Y, brown

linear dimension

tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4
variable range	to 10	to 30	to 50	to 80	to 120	to 160	to 200	all	to 5	to 30	to 120	to
over	18	30	50	80	120	160	200		5	30	120	120

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 5 : 3	CHECKED: C. LU	DATE: 12/10/2021
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 12/10/2021

PARAM:	DATE:
K. ZHAO	12/10/2021
CHECKED:	DATE:
C. LU	12/10/2021
APPROVED:	DATE:
H. JIANG	12/10/2021

Cymannu 矽宇電子
 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
 Email: sales@cymannu.com WWW.CYMANNU.COM

PART NO: 43000806AYV10C
 TITLE: PCB connector
 CUSTOMER: