


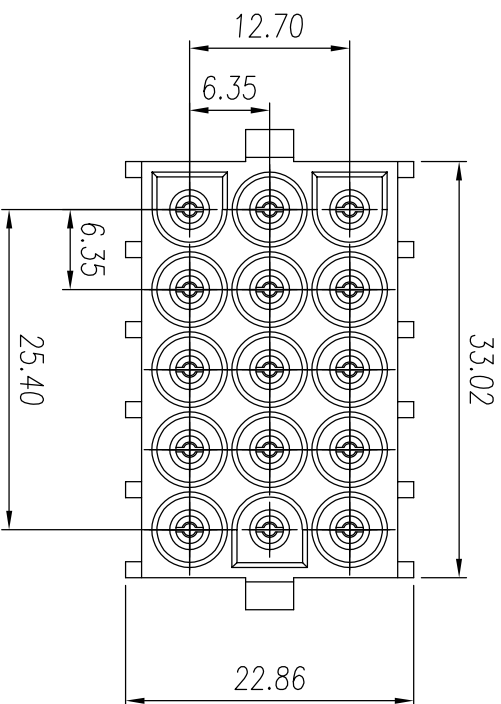
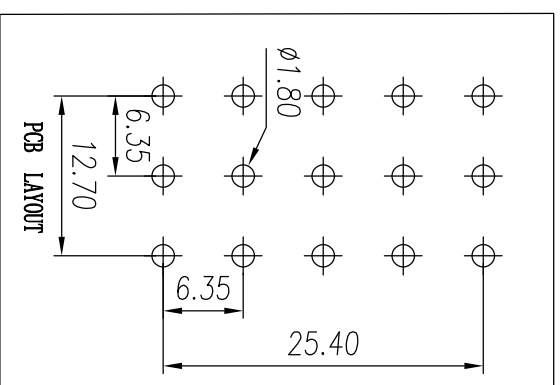


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/10/2020	

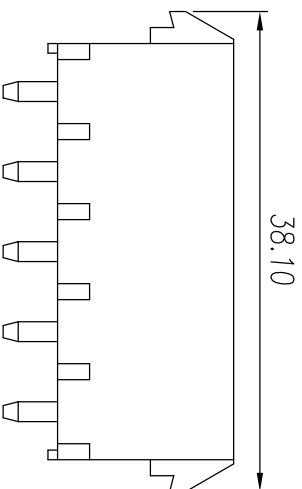

NOTES:

1. Pitch : 6.35 mm, Poles : N=05*3 P
2. Rate voltage(V): 600 ,Rate current(A):12
3. Operating temperature: -40°C~+105°C
4. Diameter for matched male terminal: 2.13mm
5. RoHS Compliance
6. Material: Housing PA66,UL94V-0
Pin Phosphor bronze,Sn plated

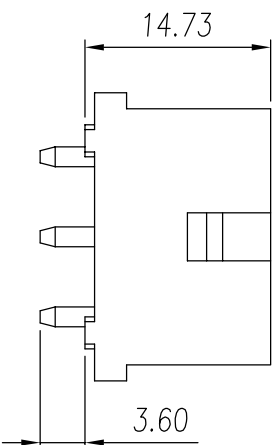

43000815HY10C
Standard

Series No

Color: 1Y, white

- 2Y, black
- 3Y, grey
- 4Y, green
- 5Y, blue
- 6Y, yellow
- 7Y, transparent
- 8Y, brown

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

linear dimension		≡	—	□	//	⊥						
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to

SIZE:	A4	SCALE:	5 : 3	CHECKED:	C. LU	DATE:	12/10/2021
UNIT: mm	1 / 1	APPROVED:	H. JIANG	DATE:	12/10/2021	PART NO.:	43000815HY10C
				TITLE:	PCB connector	CUSTOMER:	

Cymannu 矽宇電子
NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
Email: sales@cymannu.com WWW.CYMANNU.COM