
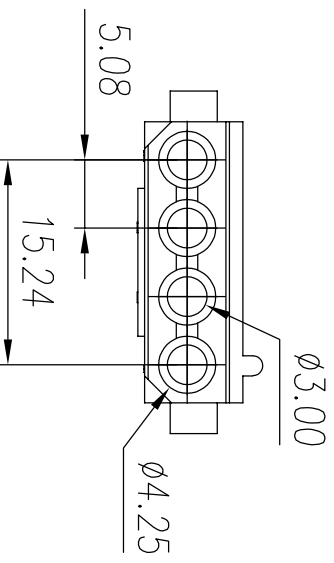
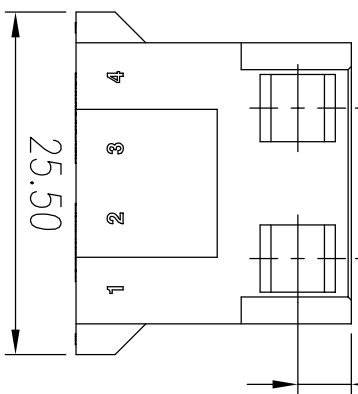
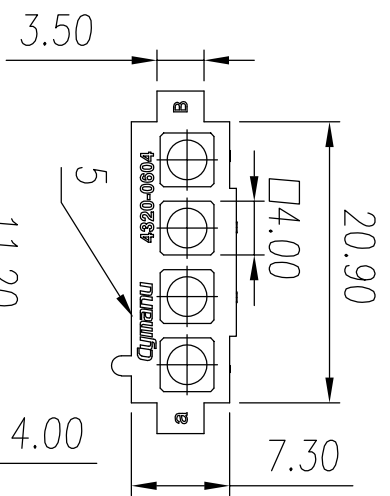
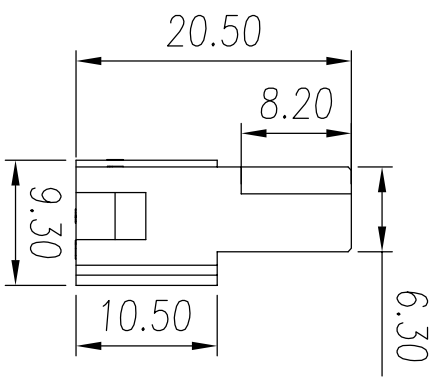


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	02/22/2022	

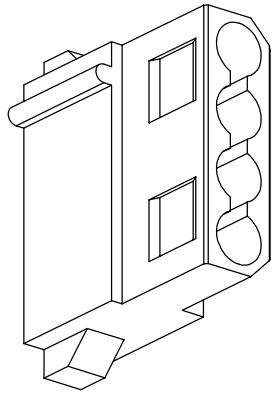

NOTES:

1. Pitch : 5.08 mm, Poles : N=04 P
2. Operating temperature: -40°C~+105°C
3. RoHS Compliance
4. Material: Housing Halogen free PA66, UL94V-0
5. Company Logo

43200604YY10A
 Series No
 Color: 1Y, white
 2Y, black
 3Y, grey
 4Y, green
 5Y, blue
 6Y, yellow
 7Y, transparent
 8Y, brown
 Standard

linear dimension

tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 4 : 3	DRAWN: K. ZHAO	CHECKED: C. LU	APPROVED: H. JIANG	DATE: 02/22/2022	DATE: 02/22/2022	DATE: 02/22/2022	UNIT: mm	SHEET: 1 / 1
----------	--------------	----------------	----------------	--------------------	------------------	------------------	------------------	----------	--------------

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
 Email: sales@cymannu.com WWW.CYMANNU.COM