


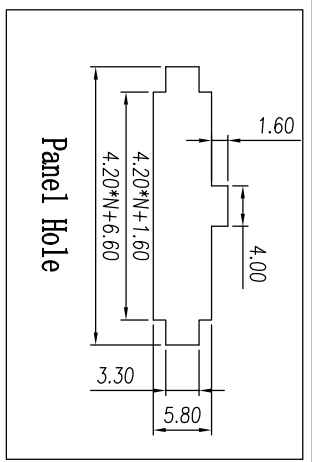

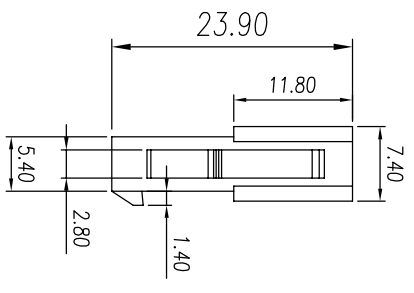


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	03/19/2021	

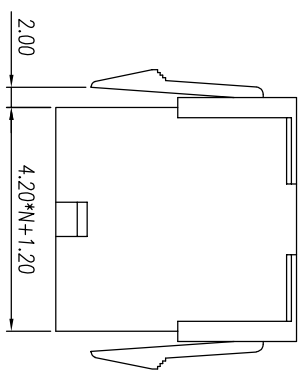

NOTES:

1. Pitch : 4.2 mm, Poles : N= 02~05 P
2. Operating temperature: -40°C~+105°C
3. RoHS Compliance
4. Material: Housing PA66, UL94V-0
5. Applicable Panel: Panel Hole  
Panel Thickness t=0.8~2.0



431104XXXXYY10A ——— CIRCUIT SIZE:02~05  
 Series No ——— Standard  
 Color: 1Y, white  
 2Y, black  
 3Y, grey  
 4Y, green  
 5Y, blue  
 6Y, yellow  
 7Y, transparent  
 8Y, brown

431104XXXXYY10A      431104XXXXYY20A

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

variable range	linear dimension										tolerance	
	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	over 5 to 30	over 30 to 120		
	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

SIZE: A4	SCALE: 4 : 3	DRAWN: K. ZHAO	CHECKED: C. LU	DATE: 03/19/2021
UNTT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 03/19/2021	

PART NO: 431104XXXXYY10A	TITLE: Connector sheath
--------------------------	-------------------------

**Cymannu** 矽宇電子  
 NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD  
 Email: sales@cymannu.com      WWW.CYMANNU.COM