

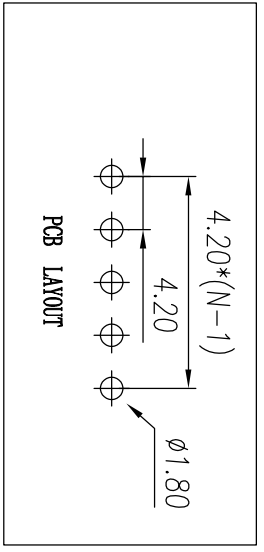




REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	05/15/2022	

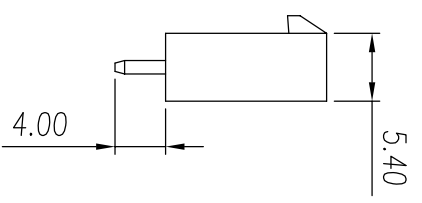

NOTES:

1. Pitch : 4.2 mm, Poles : N= 02~05 P
2. Rate voltage(V): 600 ,Rate current(A):13
3. Operating temperature: -40°C~+105°C
4. The recommended maximum thickness of PCB is 1.78mm
5. RoHS Compliance
6. Material: Housing PA66, UL94V-0
Pin Phosphor bronze, Sn plated

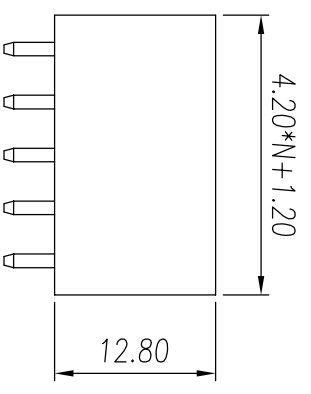

431404XXYY10C
 Series No: _____
 Color: 1Y, white
 2Y, black
 3Y, grey
 4Y, green
 5Y, blue
 6Y, yellow
 7Y, transparent
 8Y, brown

linear dimension

over 18 to 30	±0.25	over 50 to 80	±0.35	over 80 to 120	±0.45	over 120 to 160	±0.60	over 160 to 200	±0.75	all 5 to 5	0.5	over 5 to 30	0.025	over 30 to 120	0.06	over 120 to 120	0.12	over 120 to 120	0.4
---------------	-------	---------------	-------	----------------	-------	-----------------	-------	-----------------	-------	------------	-----	--------------	-------	----------------	------	-----------------	------	-----------------	-----

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4
-----------	-------	-------	-------	-------	-------	-------	-------	-----	-------	------	------	-----

SIZE: A4	SCALE: 5 : 3	CHECKED: C. LU	DATE: 05/15/2022	PART NO: 431404XXYY10C
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 05/15/2022	TITLE: 4314-04XX, PCB connector

Cymannu 囍字电子
 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
 Email: sales@cymannu.com WWW.CYMANNU.COM