
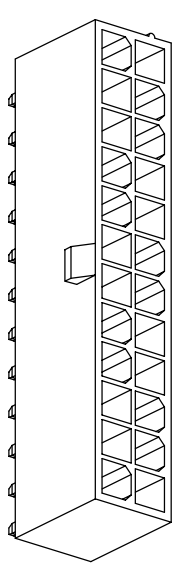
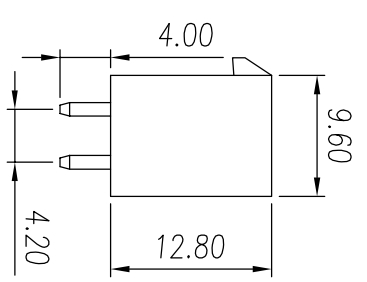
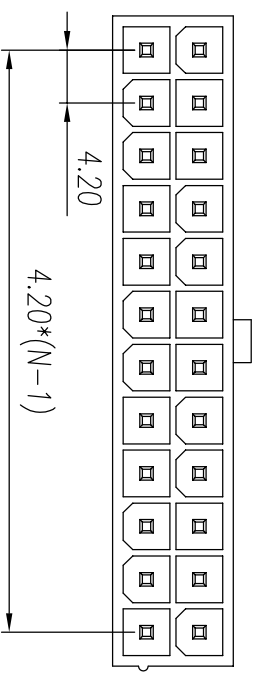
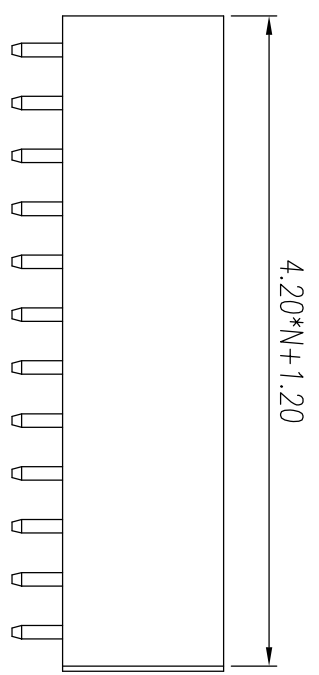


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	05/15/2022	

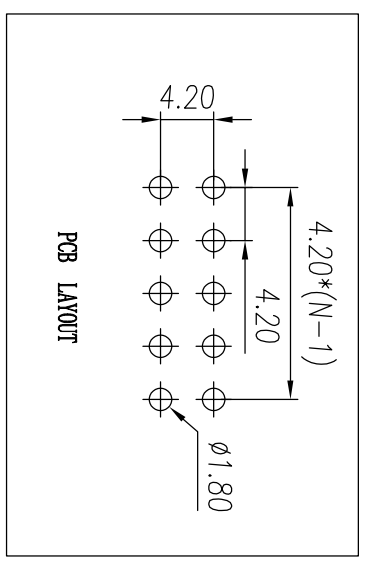

- NOTES:
1. Pitch : 4.2 mm, Poles : N=2\*02~2\*12 P
  2. Rate voltage(V): 600 ,Rate current(A):13
  3. Operating temperature: -40°C~+105°C
  4. The recommended maximum thickness of PCB is 1.78mm
  5. RoHS Compliance
  6. Material: Housing PA66, UL94V-0 Phosphor bronze, Sn plated

431404XXHYY10C  
 Series No  
 Color: 1Y, white  
 2Y, black  
 3Y, grey  
 4Y, green  
 5Y, blue  
 6Y, yellow  
 7Y, transparent  
 8Y, brown

CIRCUIT SIZE:04~24  
 Standard

linear dimension

tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4
variable range	to 10	18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	all	5 to 5	30 to 30	120 to 120	to to
over	18	30	50	80	120	160	200	5	5	30	120	to

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 5:3	CHECKED: C. LU	DATE: 05/15/2022	PART NO: 431404XXHYY10C
UNIT: mm	SHEET: 1/1	APPROVED: H. JIANG	DATE: 05/15/2022	TITLE: 4314-04XXH, PCB connector

**Cymannu** 唎字電子

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD  
 Email: sales@cymannu.com WWW.CYMANNU.COM