
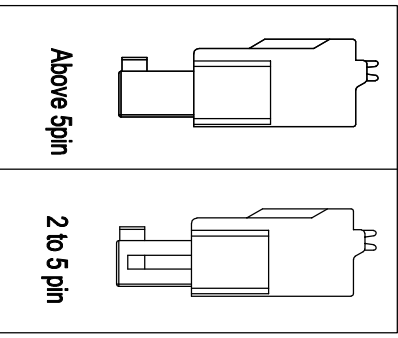
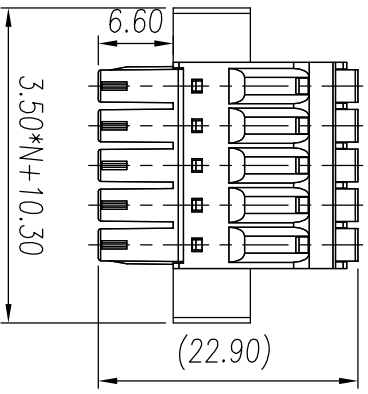
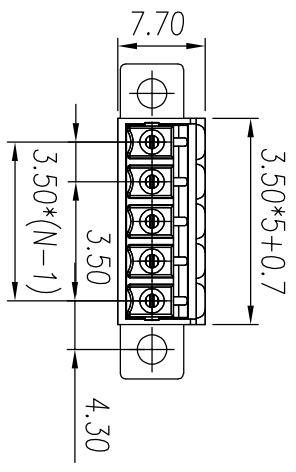


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	05/18/2021	



NOTES:  
1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	8	/	8
Rate impulse voltage(KV)	1.6		


Wire range : 26 ~ 16 AWG

2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5	2.5	2.5
Rate voltage(V)	250	160	160
Rate current(A)	7		

Wire range : 0.2 ~ 1.5 mm<sup>2</sup>

3. Pitch : 3.50 mm, Poles : N = 02~24 P
4. Stripping length : 8 ~ 10mm
5. Operating temperature: -40°C~+105°C
6. RoHS Compliance
7. Material: Housing PA66, UL94V-0  
Clamp copper alloy, Sn plated

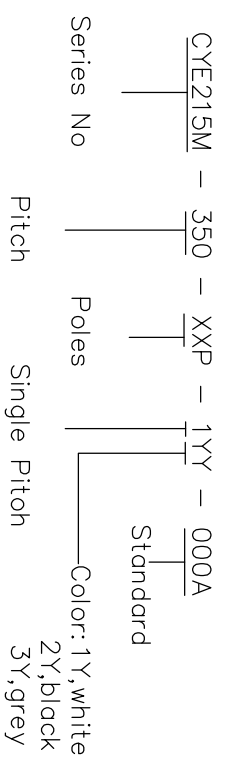

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

linear dimension	≡	—	□	//	⊥
over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200
tolerance ±0.15	±0.25	±0.35	±0.45	±0.60	±0.75
all	to 5	over 5 to 30	over 30 to 120	over 120 to 160	over 160 to 200
0.025	0.06	0.12	0.4		

SIZE:	SCALE:	CHECKED:	DATE:	PART NO.:
A4	3 : 2	C. LU	05/18/2021	CYE215M-350-XXP-1YY-000A
UNIT: mm	SHEET:	APPROVED:	DATE:	CUSTOMER:
1 / 1	1 / 1	H. JIANG	05/18/2021	Plug in connector

**Cymannu** 唎字電子  
NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD  
Email: sales@cymannu.com WWW.CYMANNU.COM