

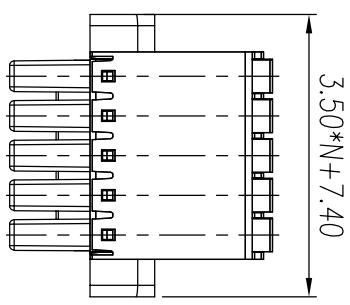
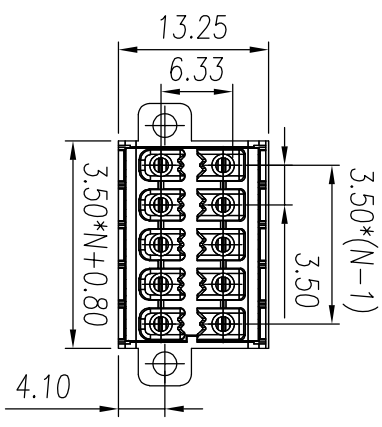


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	05/22/2021	



NOTES:

1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	8	/	8
Rate impulse voltage(KV)	1.6		


Wire range : 26 ~ 16 AWG

2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5	2.5	2.5
Rate voltage(V)	250	160	160
Rate current(A)	7		

Wire range : 0.2 ~ 1.5 mm²

- Pitch : 3.50 mm, Poles : N = 2*2 ~ 24*2 P
- Stripping length : 8 ~ 10mm
- Operating temperature: -40°C~+105°C
- RoHS Compliance
- Material: Housing PA66, UL94V-0
- Clamp copper alloy, Sn plated

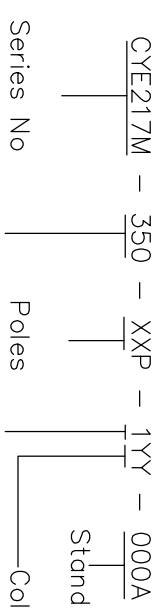

Pitch Single Pitch

- Color: 1Y, white
 2Y, black
 3Y, grey
 4Y, green
 5Y, blue
 6Y, yellow
 7Y, transparent
 8Y, brown

Remark: This drawing is a controlled document for Cymann. All specifications are subject to change without prior notice.

linear dimension	
over 18 to 30	over 50 to 80
over 30 to 50	over 80 to 120
over 50 to 80	over 120 to 160
over 80 to 120	over 160 to 200
all	all
over 5 to 30	over 30 to 120
over 120 to 180	over 180 to 240
tolerance ±0.15	±0.25
±0.35	±0.45
±0.60	±0.75
±0.90	0.5
0.025	0.06
0.12	0.4

SIZE: A4	SCALE: 3 : 2	CHECKED: C. LU	APPROVED: H. JIANG	DATE: 05/22/2021	DATE: 05/22/2021	DATE: 05/22/2021
UNIT: mm	SHEET: 1 / 1	PARAM: K. ZHAO	DATE: 05/22/2021	PART NO: CYE217M-350-XXP-1YY-000A	TITLE: Plug in connector	CUSTOMER:

Cymann 囍字電子

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD

Email: sales@cymann.com WWW.CYMANNU.COM