

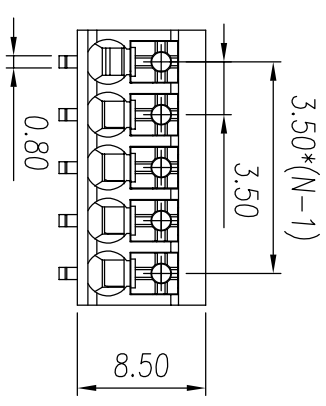
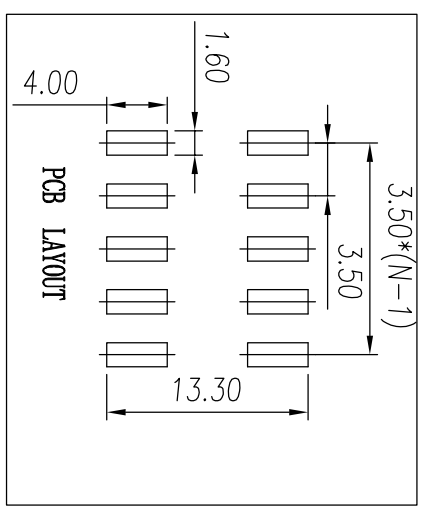
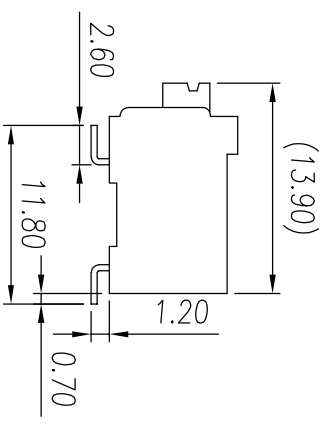


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	06/14/2021	

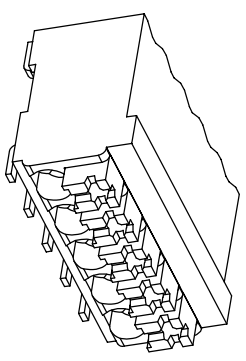


NOTES:
1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	12	/	10
Rate impulse voltage(KV)	1.6		

Wire range : 26 ~ 14 AWG
2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5	2.5	2.5
Rate voltage(V)	250	160	160
Rate current(A)	13.5		

- Wire range : 0.2 ~ 1.5 mm²
- 3. Pitch : 3.50 mm, Poles : N = 02~24 P
- 4. Stripping length : 7 ~ 9 mm
- 5. Operating temperature: -40°C~+105°C
- 6. RoHS Compliance
- 7. Material: Housing LCP, UL94V-0
Pin copper alloy, Sn plated

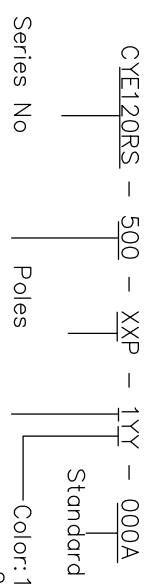

- Color: 1Y, white
2Y, black
3Y, grey
4Y, green
5Y, blue
6Y, yellow
7Y, transparent
8Y, brown

Remark: This drawing is a controlled document for Cymann. All specifications are subject to change without prior notice.

linear dimension	tolerance
over 18 to 30	±0.15
over 30 to 50	±0.25
over 50 to 80	±0.35
over 80 to 120	±0.45
over 120 to 160	±0.60
over 160 to 200	±0.75
all	±0.90
to 5	0.5
to 5 to 30	0.025
to 30 to 120	0.06
to 120	0.12
to 120	0.4

SIZE:	SCALE:	CHECKED:	DATE:
A4	2 : 1	K. ZHAO	06/14/2021
UNTT: mm	SHEET:	APPROVED:	DATE:
1 / 1	1 / 1	H. JIANG	06/14/2021

NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD
 Email: sales@cymann.com WWW.CYMANNU.COM